




F16.3

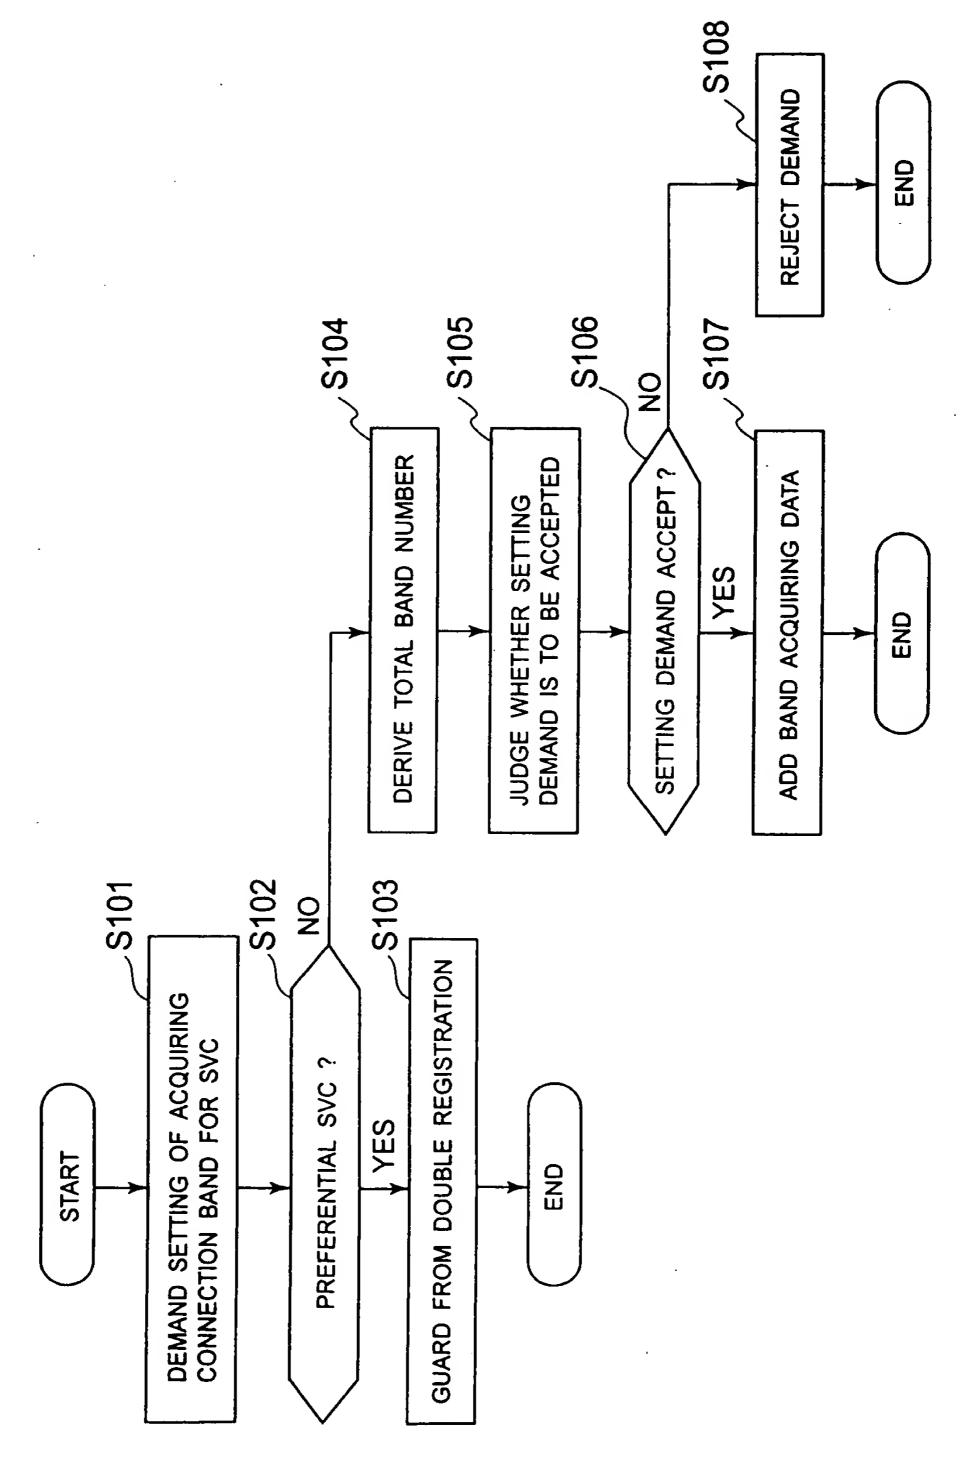


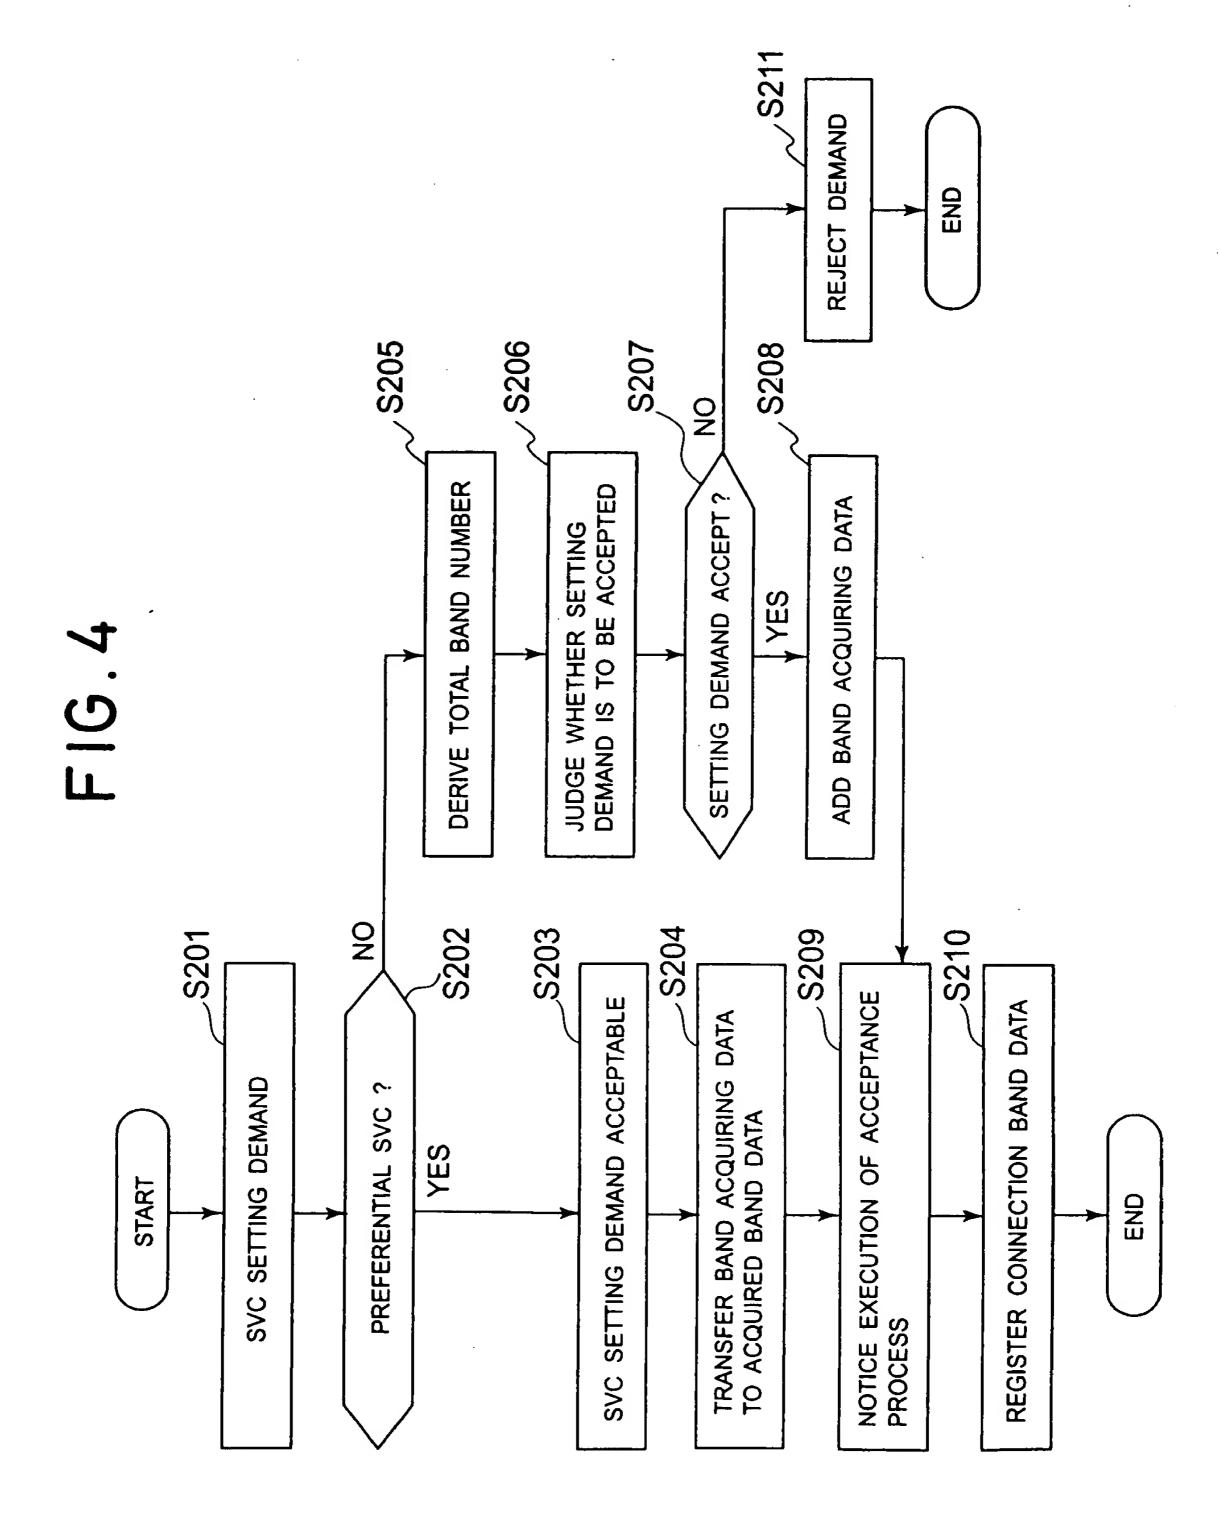



The state of the s


FIG.5

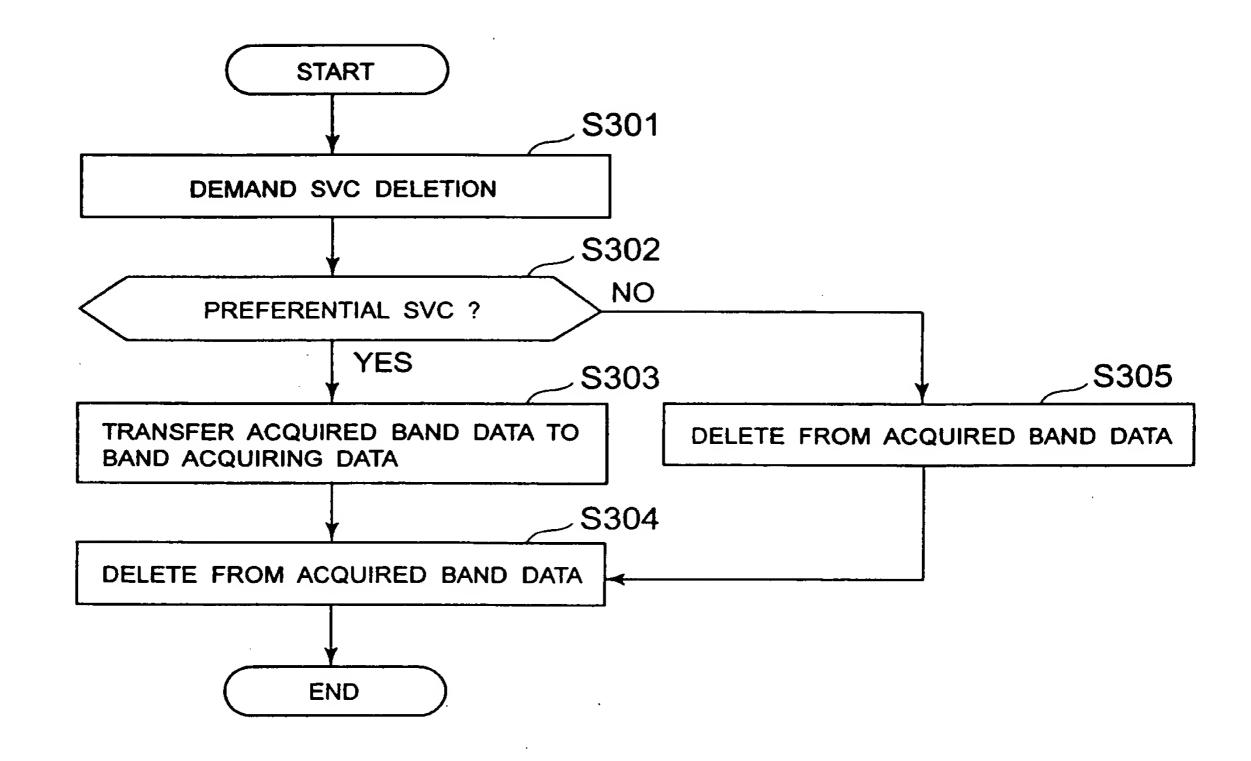

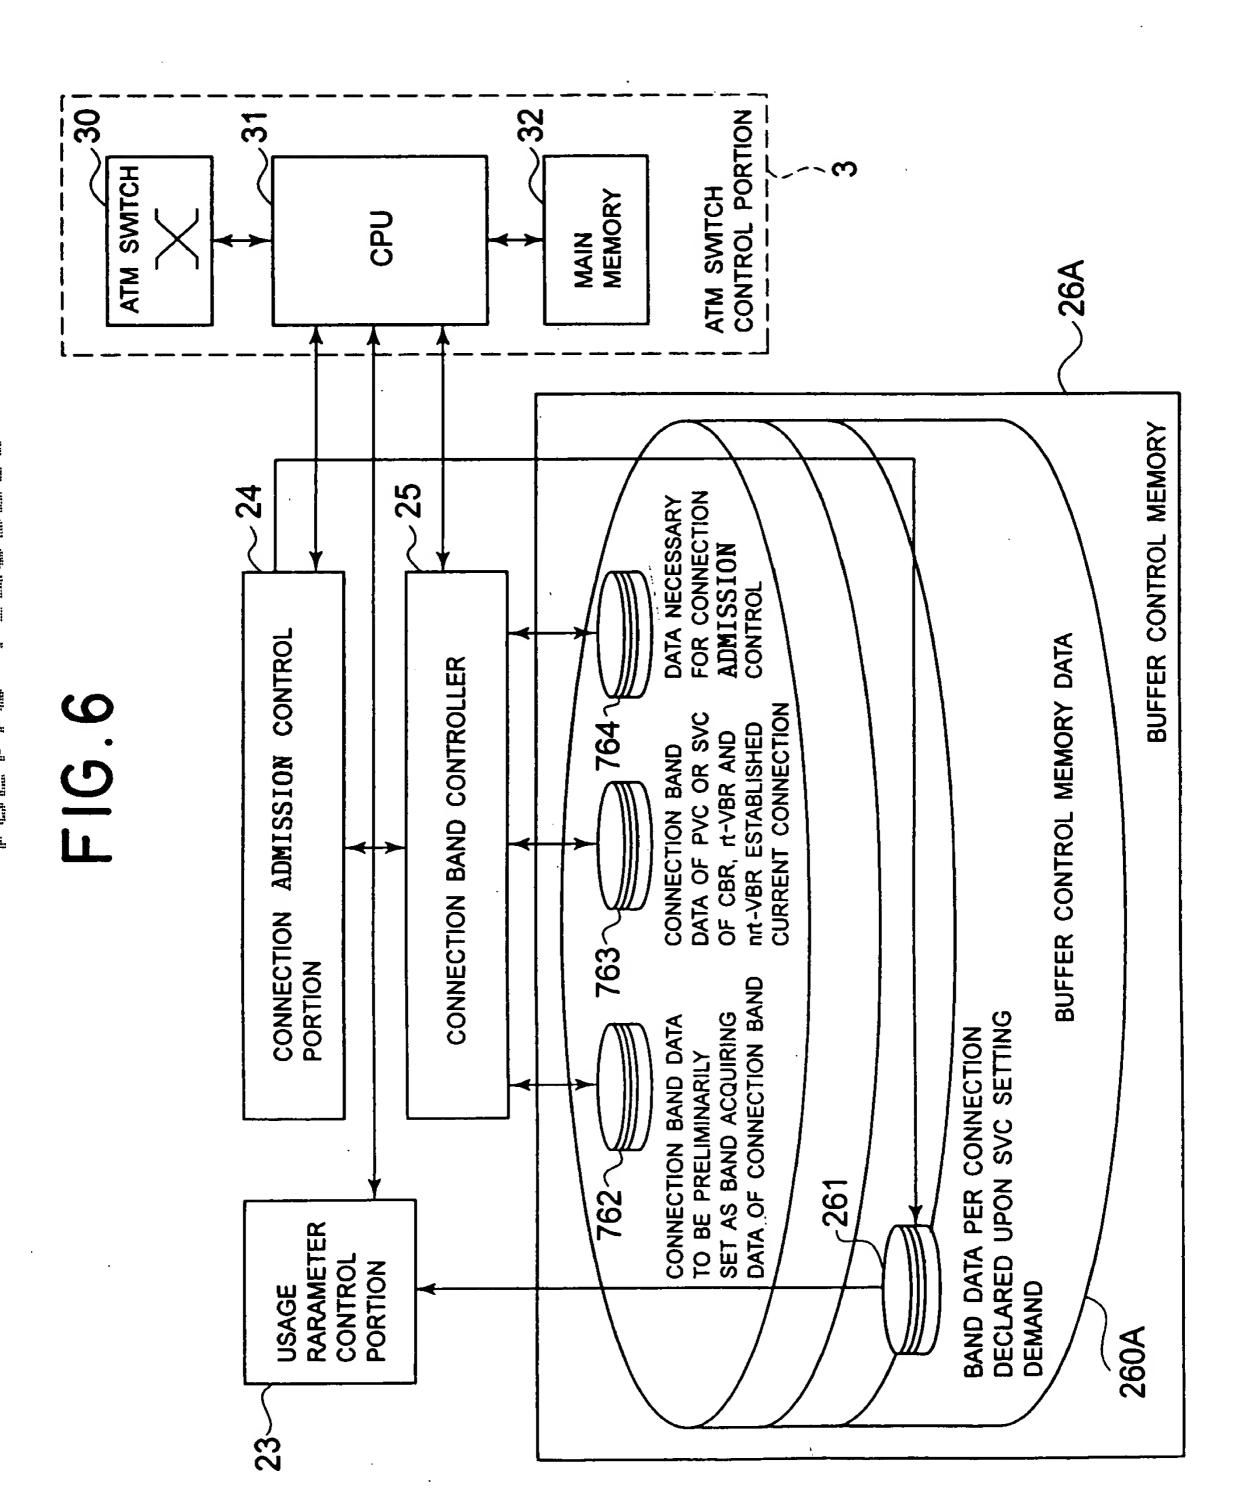

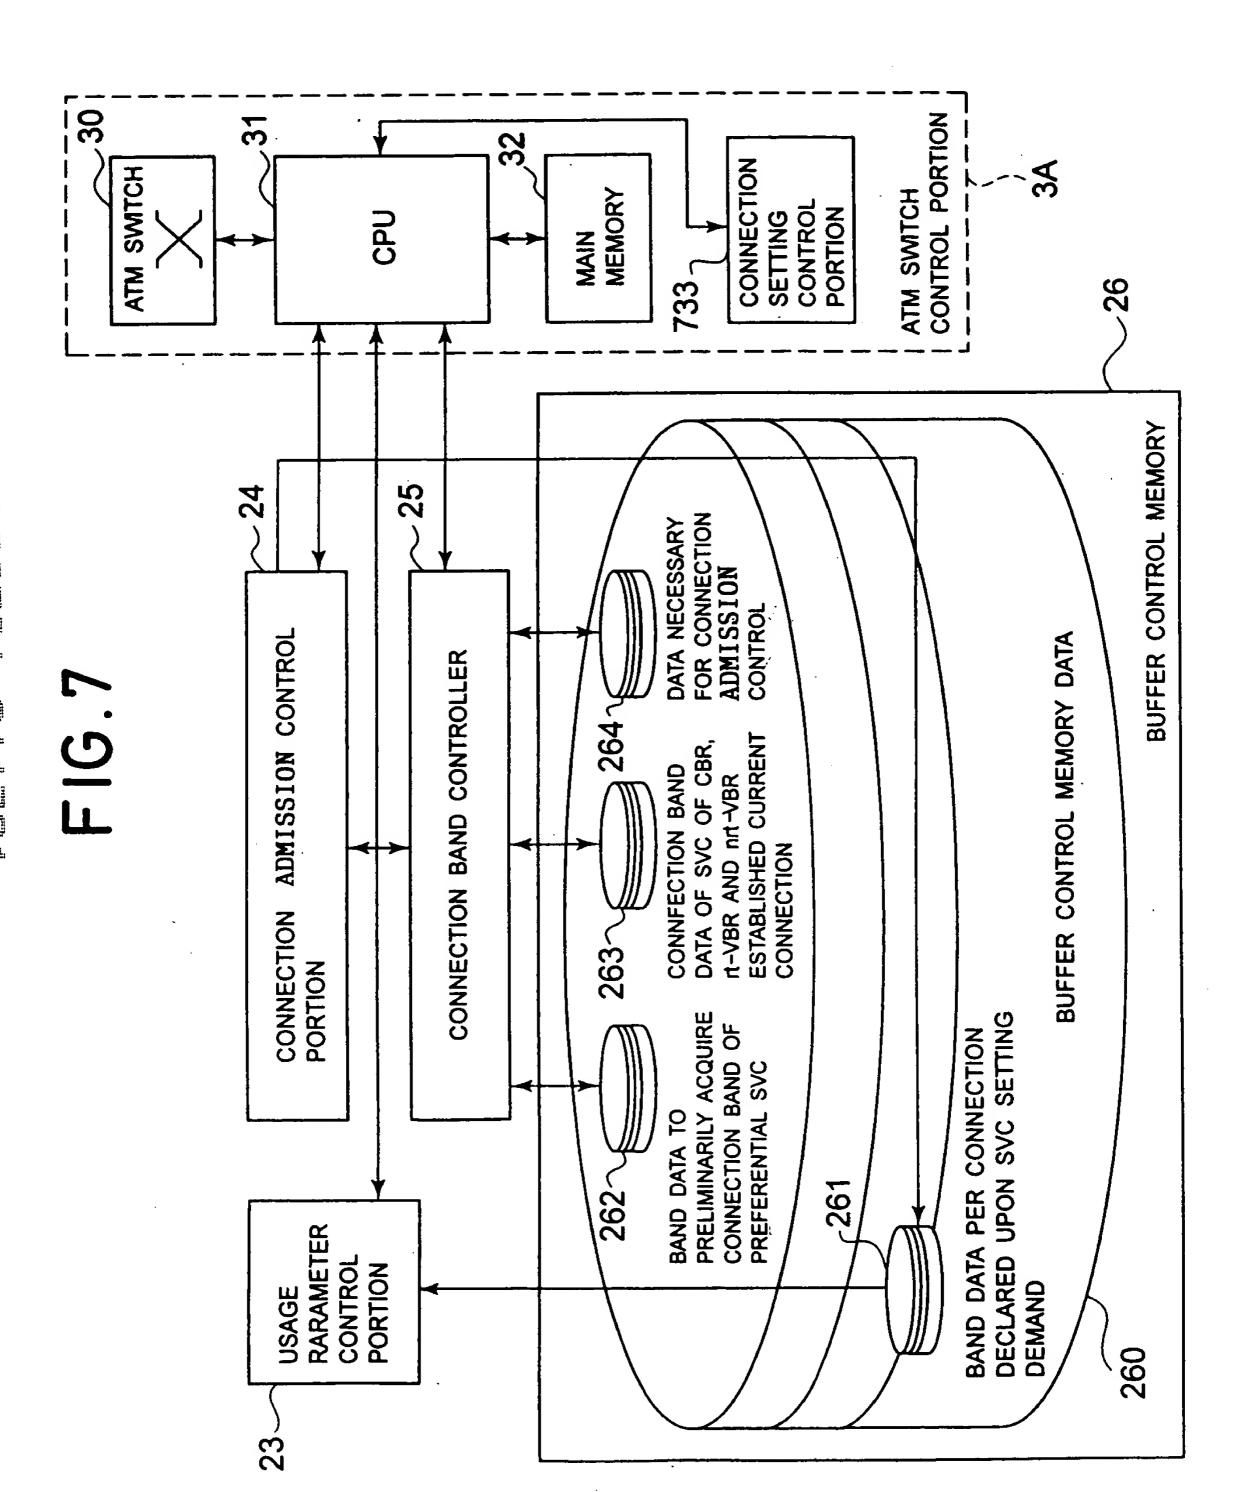

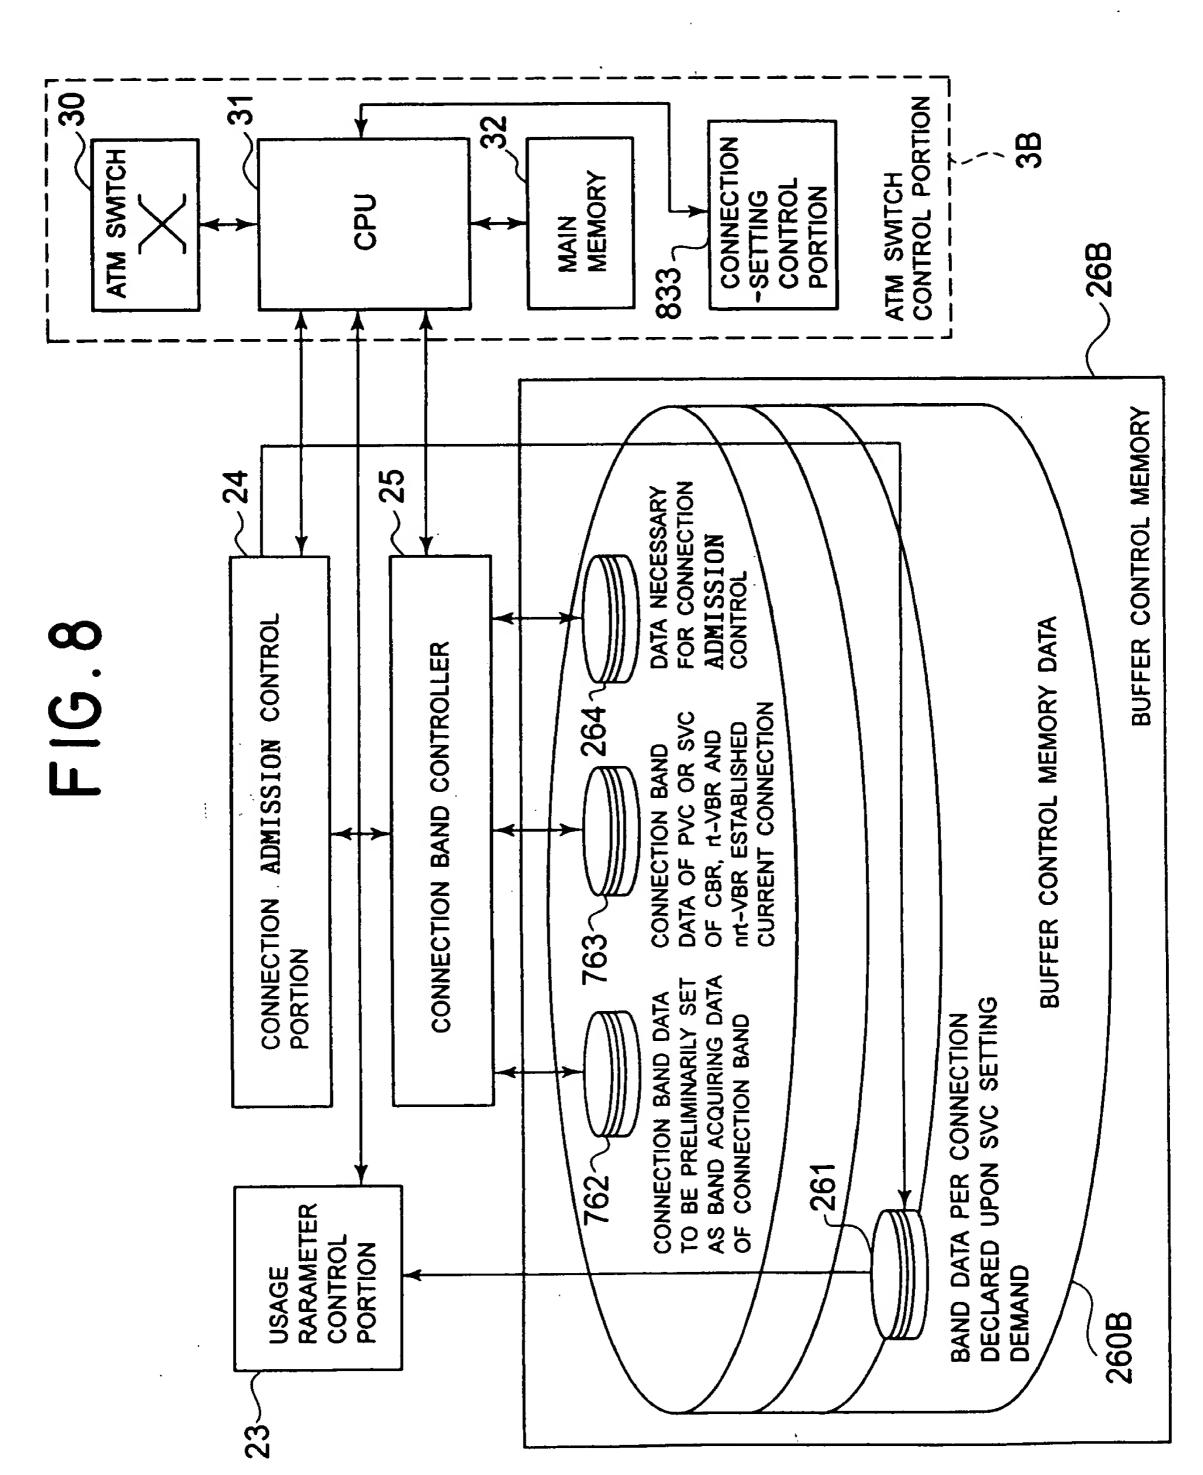

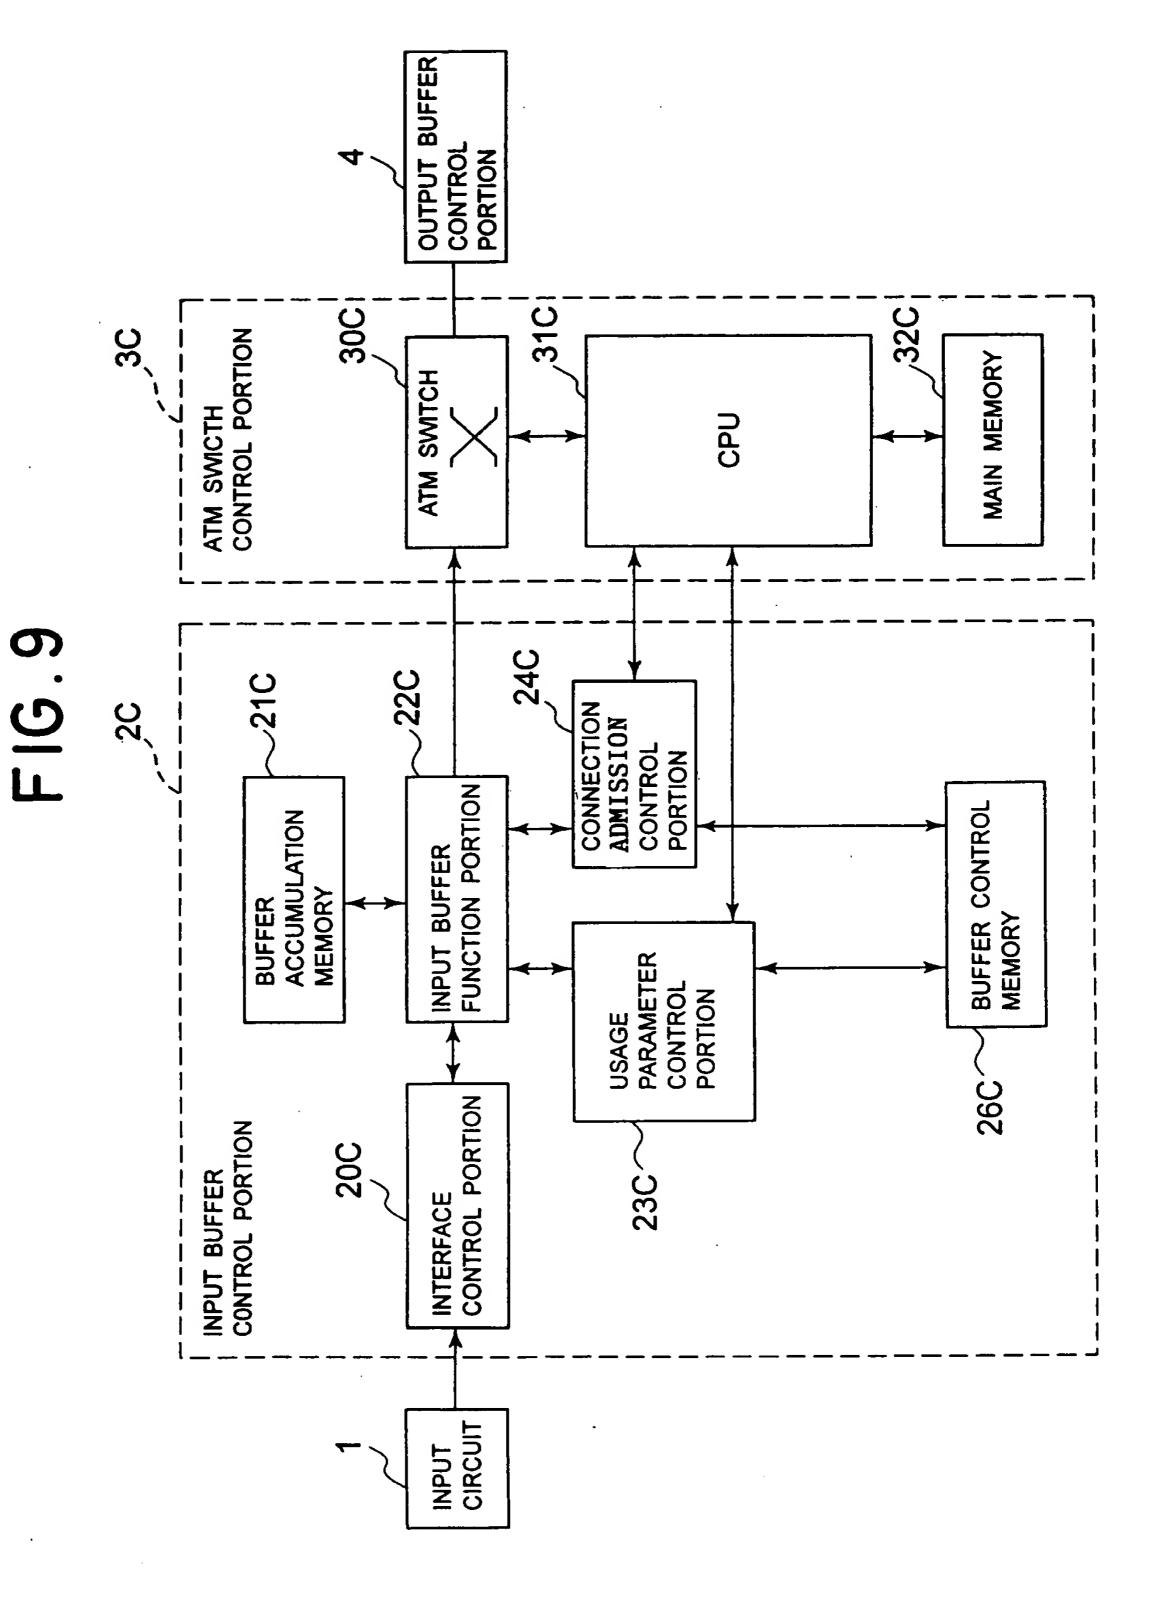

31C ATM SWITCH CONTROL PORTION 30 ATM SWITCH MAIN MEMORY SPU BUFFER CONTROL MEMORY 24C FOR CONNECTION ADMISSION DATA NECESSARY CONTROL CONTROL F1G.10 BUFFER CONTROL MEMORY DATA 264C √ DATA OF SVC OF CBR, r-VBR AND nrt-VBR ESTABLISHED CURRENT CONNECTION ADMISSION CONNFECTION BAND CONNECTION **PORTION** 263C ~ BAND DATA PER CONNECTION DECLARED UPON SVC SETTING CONNECTION -261C RARAMETER CONTROL **PORTION** USAGE DEMAND 260C 23C

The state of the s